

OPTIMUS +

serija

A
+++

Energetska
klasa

R32

Freon




WiFi
(uključen)



Grijač
kompresora



Grijač
tavice

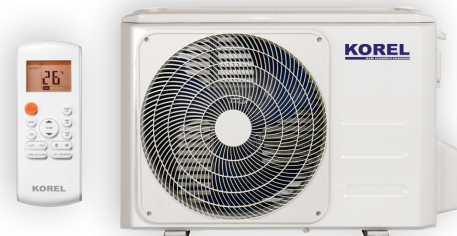

KLIMA
K O N C E P T

UNUTARNJA JEDINICA	KMA32-09FNX-G	KMA32-12FNX-G	KMA32-18FNX-G	KMA32-24FNX-G
VANJSKA JEDINICA	KMA32-09FN8-G	KMA32-12FN8-G	KMA32-18FN8-G	KMA32-24FN8-G
Napajanje (ph-V-Hz)	220-240V,1Ph,50Hz	220-240V,1Ph,50Hz	220-240V,1Ph,50Hz	220-240V,1Ph,50Hz
Kapacitet hlađenja (kW)	2,64	3,52	5,27	7,00
Priključak el. energije hlađenje (W)	613(90-1140)	977(130-1650)	1550(560-2050)	2510(420-3200)
Kapacitet grijanja (kW)	2,93	3,81	5,60	7,30
Priključak el. energije grijanje (W)	637(110-1080)	977(160-1560)	1500(780-2000)	2130(300-3100)
SEER (W)	9.30	8.5	7	6.5
Energetska klasa (h)	A+++	A+++	A++	A++
SCOP(W)	4.6	4.6	4	4
Energetska klasa (g)	A++	A++	A+	A+
Protok zraka unutarnje jedinice (m3/h)	483/362/303	584/477/395	730/500/420	1020/830/640
Razina zvučnog tlaka unutarnje j. (H/M/L) (dB(A))	36.5/29.0/24.0	39.5/33/25	43/33.5/28	47/41.5/30.5
Razina zvučne snage unutarnje j. (dB(A))	55	55	57,0	63,0
Dimenzije unutarnje jedinice - ŠxVxD (mm)	802x297x189	802x297x189	965x319x215	1080x335x226
Težina unutarnje jedinice (kg)	8.6/11.1	8.6/11.1	10.9/14.2	13.7/17.3
Razina zvučnog tlaka vanjske jedinice (dB(A))	54.0	54.5	55,5	60,5
Razina zvučne snage vanjske jedinice (dB(A))	60	62	65,0	67,0
Dimenzije vanjske jedinice - ŠxVxD (mm)	765x555x303	765x555x303	805x554x330	890x673x342
Težina vanjske jedinice (kg)	26.7/29.1	26.7/29.1	33.5/36.1	43.9/46.9
Rashladno sredstvo	R32	R32	R32	R32
Promjer cijevi tekuća/plinska faza (inch(mm))	6.35mm(1/4in)/9.52mm (3/8in)	6.35mm(1/4in)/9.52mm (3/8in)	6.35mm(1/4in)/12.7mm (1/2in)	9.52mm(3/8in)/15.9mm (5/8in)
Max duljina cjevovoda (m)	25	25	30	30
Max visinska razlika (m)	10	10	20	20
Područje rada hlađenje/grijanje (°C) min-max	-15-50/-15-24	-15-50/-15-24	-15-50/-15-24	-15-50/-15-24
Razmak između nosača (cm)	45,2	45,2	51,1	66,3



Detekcija
curenja plina



Samodijagnostika i automatska
zaštita



Hitna
funkcija



Auto
restart



Niska temp.
hlađenja



Super gusti
filter



Karbonski
filter



Samočišćenje



Memorija
položaja klapne



Odvod
kondenzata
na 2 strane



Turbo način
rada



Timer



Slijedi me
funkcija



Pozlaćene
lamele



Auto, pomak
horizontalnih
klapni



8°C
grijanje



ECO



1W
Standby



Noćni način
rada



Multi
split



Mono
split