

Bi2 smart

SLR smart inverter

Total flat inverter fan coil radiator.

No unsightly grill, total and perfect integration with the environment.



Bi2 is the winner of the GOOD DESIGN AWARD 2014. Founded in Chicago in 1950, GOOD DESIGN is the oldest and most acknowledged international competition for design excellence.



Design by S. Ercoli & A. Garlandini

FEATURES

Cools, Dehumidifies, Heats and Filters

Terminal with integrated heating panel

Compact: thickness of just 12,9 cm


Range consists of 5 power models

DC brushless Motor

Smart sides

Total Flat Aesthetic with integrated vacuum system

installation:




floor

wall


Available in colors: ☐ White Ral 9010

MODEL		Bi2 Smart with heating panel (SLR Smart Inverter)				
		SLR smart 200	SLR smart 400	SLR smart 600	SLR smart 800	SLR smart 1000
White	cod.	01629	01630	01631	01632	01633

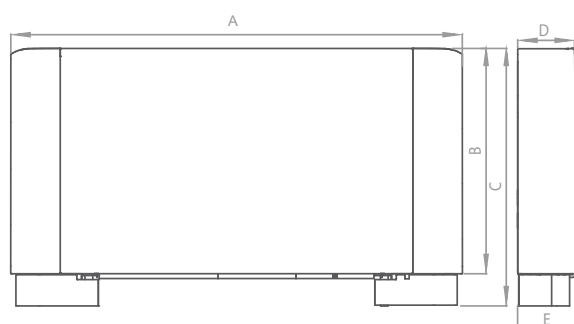

		200	400	600	800	1000
A	mm	759	959	1159	1359	1559
B	mm	579	579	579	579	579
C	mm	659	659	659	659	659
D	mm	129	129	129	129	129
E	mm	150	150	150	150	150
Weight	kg	13,5	15,5	19,5	22,5	25,5

- 1 Valve with thermoelectric actuator (accessory kit)
- 2 Tubular heating panel
- 3 High Efficiency Coil
- 4 Water temperature sensor
- 5 High efficiency tangential fan
- 6 Condensation collector basin
- 7 DC brushless inverter motor
- 8 Electronic controls (accessory kit)

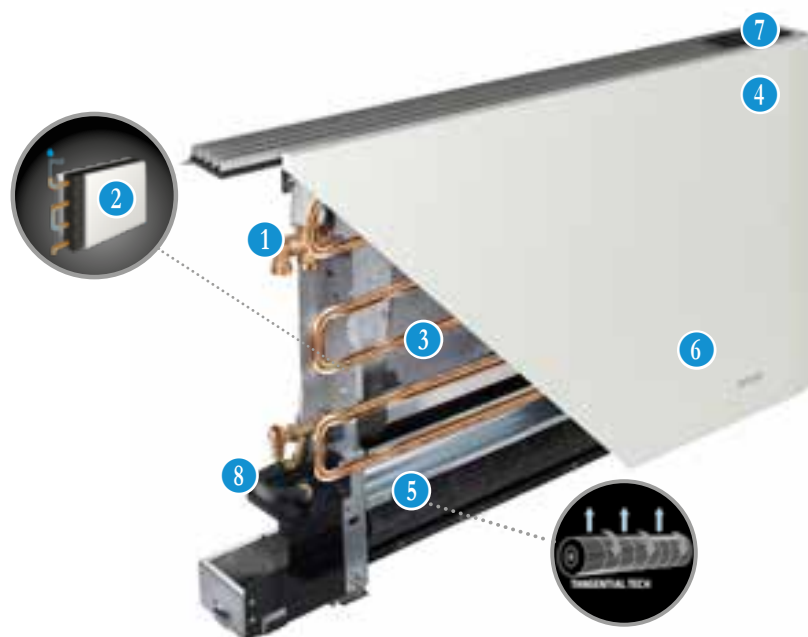

			B12 SLR smart inverter				
MODEL			200	400	600	800	1000
Total cooling capacity (a)	(E)	kW	0,82	1,74	2,54	3,29	3,78
Sensible cooling capacity (a)	(E)	kW	0,64	1,25	1,94	2,54	2,98
Water flow rate (a)		lt/h	142	302	446	573	655
Water pressure loss (a)	(E)	kPa	13,1	8,2	19	18,7	18,2
Heating capacity (50°C) (b)	(E)	kW	1,05	2,31	3,12	4,10	4,67
Water flow rate (50°C) (b)		lt/h	84	185	249	329	374
Water pressure loss (50°C) (b)	(E)	kPa	10,9	6,8	15,8	15,5	15,1
Heating capacity (70°C) (c)		kW	1,77	3,88	5,21	6,88	7,83
Water flow rate (70°C) (c)		lt/h	152	334	448	592	673
Water pressure loss (70°C) (c)		kPa	10,9	7,0	14,3	12,7	12,5
Battery water capacity		l	0,47	0,8	1,13	1,46	1,8
Maximum operating pressure		bar	10	10	10	10	10
Water connections		inches	Eurocone 3/4	Eurocone 3/4	Eurocone 3/4	Eurocone 3/4	Eurocone 3/4
Air flow min (d)		m³/h	100	170	180	370	420
Air flow max (d)		m³/h	160	320	460	575	650
Absorbed power min	(E)	W	5	6	7	8	9
Absorbed power max	(E)	W	11	19	20	24	27
Sound power min Lw	(E)	dB(A)	38	39	41	42	42
Sound power max Lw	(E)	dB(A)	52	53	53	54	54
Sound pressure (f)		dB(A)	34	36	37	35	38
Electrical supply		V/ph/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Max capacity static heating (50°C)		kW	0,37	0,42	0,50	0,62	0,77
Max capacity static heating (70°C)		kW	0,59	0,71	0,84	1,04	1,28
Water content heating panel		l	0,3	0,5	0,6	0,7	0,9

Performance at maximum ventilation speed

(a) Water temperature in battery inlet 7°C, water temperature in battery outlet 12°C, ambient air temperature 27°C b.s. and 19°C b.u.

(b) Water temperature in battery inlet 50°C, water flow in cooling + panel, inlet ambient air temperature 20°C

(c) Water temperature in battery inlet 70°C, water temperature in battery outlet 60°C, ambient air temperature inlet 20°C

(d) Air flow measured with clean filters

(E) Eurovent certificate

(f) Sound pressure measured at 1,5 m